

# DATASHEET

S01.01.01.356\_ARISTOTLE-336-45


## Area Lighting:

~45° (Wide) beam .

360 x 172 mm, 336 lens for up to 3030 size LED packages.



## 1.General Information

Lens Material	: PC
Size	: 360x172mm
typ.FWHM	: 45°
Design LED	: Luxeon 3030 square
Compatibility	: 3030
typ.Efficiency	: 93%
Fasten	: Screw
IP class	: IP66
Zhaga	: N/A
RoHS	: YES
Color	: Clear



## 2.MECHANICAL SPECIFICATION

UNIT:mm

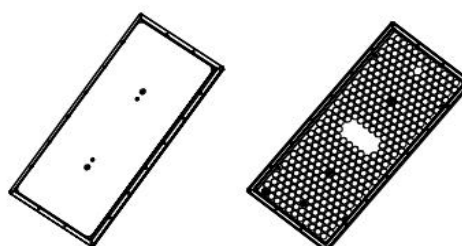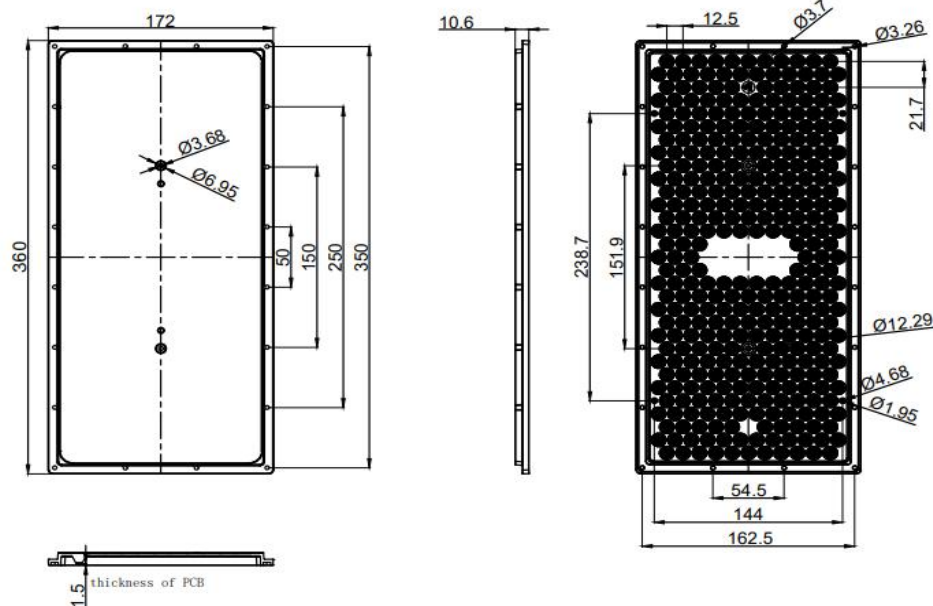

Dimensions with unmarked tolerances refer to GBT14486 tolerance table.

### 3. OPTICAL RESULTS

#### 1) PHOTOMETRIC DATA(MEASURED):

**TYF 同一方**

LED model 3030

Light colour White


LEDs/each optic 1

FWHM H46°,V45.5°

FWTM H72.2°,V71.1°

Required components:

N/A



### 4.Usage and Maintenance

- 1) If necessary, clean lenses with mild soap, water and soft cloth.
- 2) Never use any commercial cleaning solvents on lenses, like alcohol.
- 3) Please handle lens with wearing gloves, skin oils may damage lens or its optical characteristic.

### 5.Note

Please test the data again before using. The chart data is for reference only.

The appearance and specifications of the product can be changed to improve the quality and/or performance without notice.

#### SUNLUMIN OPTICS CO., LTD

501D, Plant 2, No.30, Liuhe Road, Liuyue Community,  
Henggang Str, Longgang District, Shenzhen

E  
info@sunlumin-optics.com

www.  
sunlumin.com www.  
sunlumin-optics.com