

DATASHEET

S01.01.01.105_FARADAY-64-T2S-CC

SPORTS LIGHT LENS:

IESNA Type II (short) beam.


FARADAY-64 SERIES, 236 x 70 mm with 64 lens arrays; Reach IP66 with silicone gasket; Design base on flat 3030 size LED package.

General Information

Lens Material	: PC
Size	: 236X70 mm
typ.FWHM	: Asymmetric
Design LED	: LUXEON 3030 2D Round
Compatibility	: 3030
typ.Efficiency	: 93%
Fasten	: Screw
IP class	: IP66
Seal	: Silicon gasket
Zhaga	: NO
RoHS	: YES
Color	: Matt



版本 REV	日期 DATE	变更内容 CHANGE (ITEM)
A0	2020-6-10	新建 NEW

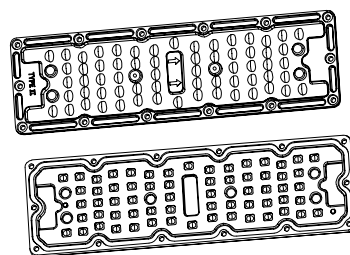

产品名称 Item name	S01.01.01.105_ FARADAY-64-T2S-CC	产品材质 Product material	PC
图法 View	 第三视角	设计 Desiganer	Yvan
比例 Share	1:1	审核 Checked	Haiqiu
单位 Unit	MM	批核 Approved	


OPTICAL RESULTS

1) PHOTOMETRIC DATA(MEASURED):



LED model	LUXEON 3030 2D Round LES
Light colour	White
LEDs/each optic	1
FWHM	Asymmetric
Required components:	

Gasket

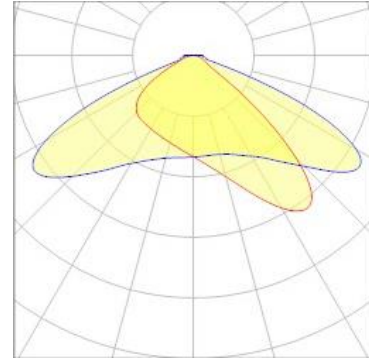


2) PHOTOMETRIC DATA(MEASURED):



LED model	PHILIPS 3030
Light colour	White
LEDs/each optic	1
FWHM	Asymmetric
Required components:	


Gasket

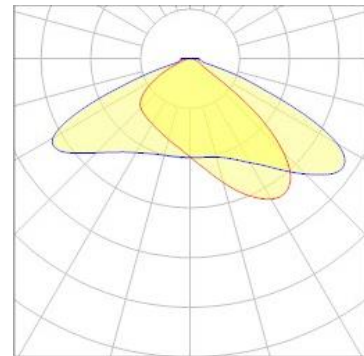



Usage and Maintenance

1) Due to varying asymmetric chip locations, especially on mid-power LEDs, the exact source of light is not always located at the centre of the LED packet. SunLumin recommends rotating such LEDs on the PCB in a regular pattern for smoother results.

Sample layout proposal:

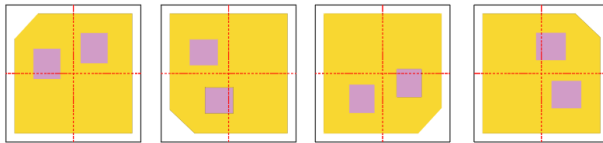

Example A

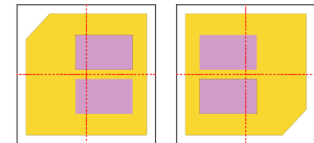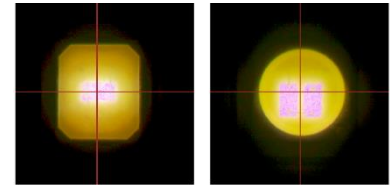

Example B

- 2) If necessary, clean lenses with mild soap, water and soft cloth.
- 3) Never use any commercial cleaning solvents on lenses, like alcohol.
- 4) Please handle lens with wearing gloves, skin oils may damage lens or its optical characteristic.

Disclaimer

When light pass through holes, columns and other structures, or part of the thin structure, will form a weld line. Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specifications.

The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value. The chart data is for reference only. Please test the data again before using

The appearance and specifications of the product can be changed to improve the quality and/or performance without notice.

SunLumin assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

Last update: 12-Aug-25