

DATASHEET

S01.01.01.486_MAXWELL-12-T2M-CB


Street & Area Lighting:

IESNA Type II (medium) beam for EN13021 M-class standard where road width is less than the pole height.



MAXWELL-12 SERIES, 50 x 50 mm 12 lens (2X5+2) arrays optimized for flat 5050 size LED packages.

General Information

Lens Material	: PC
Size	: 50X50 mm
typ.FWHM	: Asymmetric
Design LED	: LUXEON 5050 Square
Compatibility	: 5050/3535/3030
typ.Efficiency	: 92%
Fasten	: Screw
IP class	: N/A
Zhaga	: N/A
RoHS	: YES
Color	: Clear

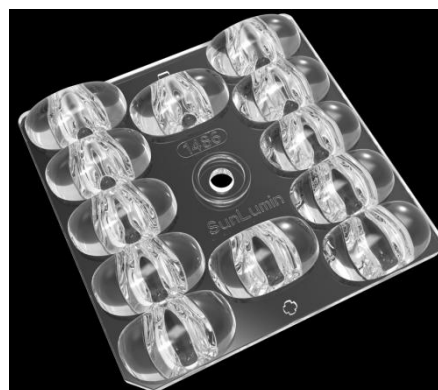

版本 REV	日期 DATE	变更内容 CHANGE (ITEM)
A0	2025-10-21	新建 NEW

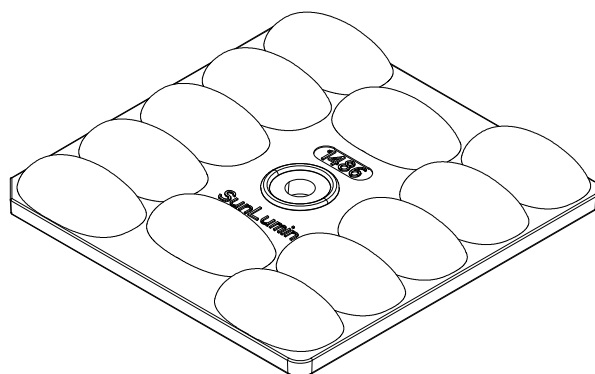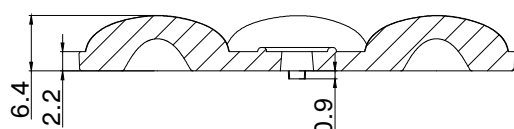

- 1.The size of the ordered number in the figure needs to be controlled;
- 2.The product shall not have lack of glue, bubbles, shrinkage, black spots and other abnormalities;
- 3.Plastic moulding general tolerances according to GB/T14486 and applies if not otherwise shown in the drawing.Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

产品名称 Item name	S01.01.01.486 MAXWELL-12-T2M-CB	产品材质 Product material	PC
图法 View	 第三视角	设计 Designed by	YeJingsi
比例 Scale	1:1	审核 Checked by	Eric
单位 Unit	MM	批核 Approved by	Eric

A4


OPTICAL RESULTS

1) PHOTOMETRIC DATA(MEASURED):



LED model LUXEON 5050 Square
Light colour White
LEDs/each optic 1
FWHM Asymmetric
Required components:

Glass

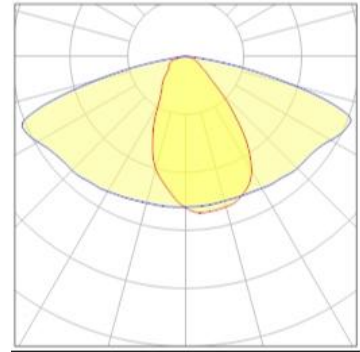


2) PHOTOMETRIC DATA(SIMULATION):



LED model JR5050 6V
Light colour White
LEDs/each optic 1
FWHM Asymmetric
Required components:

Glass

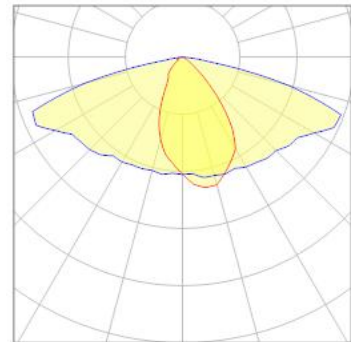


3) PHOTOMETRIC DATA(SIMULATION):




LED model GW_P9LR35pm
Light colour White
LEDs/each optic 1
FWHM Asymmetric
Required components:

Glass




Usage and Maintenance


1) Due to varying asymmetric chip locations, especially on mid-power LEDs, the exact source of light is not always located at the centre of the LED packet. SunLumin recommends rotating such LEDs on the PCB in a regular pattern for smoother results.

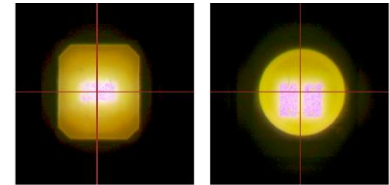

Sample layout proposal:

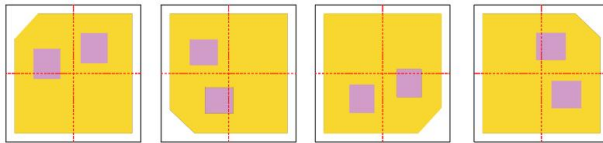

Example A



Example B

- 2) If necessary, clean lenses with mild soap, water and soft cloth.
- 3) Never use any commercial cleaning solvents on lenses, like alcohol.
- 4) Please handle lens with wearing gloves, skin oils may damage lens or its optical characteristic.

Disclaimer

When gule pass through holes, columns and other structures, or part of the thin structure, will form a weld line. Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specifications.

The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value. The chart data is for reference only. Please test the data again before using

The appearance and specifications of the product can be changed to improve the quality and/or performance without notice.

SunLumin assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

Last update: 21-Nov-25