DATASHEET

S09.01.02.489_Dalton-D50-36


Commercial & Area Lighting:

~36°Medium beam.

DALTON SERIES； Deep concave surface structure to achieve the ultimate anti-glare effect, mainly optimized for high requirement of anti-glare scene of track lighting, ceiling lighting, spot lighting, outdoor flood lighting etc.

General Information


Lens Material	:	PMMA
Holder Material	:	PC
Size	:	Ø50mm
Typ.FWHM	:	36°
Design LED	:	Samsung LC006D
Compatibility	:	LES≤9.8mm
Typ.Efficiency	:	83%
Fasten	:	Socket(optional)
IP class	:	N/A
Zhaga	:	N/A
RoHS	:	YES
Color	:	Clear

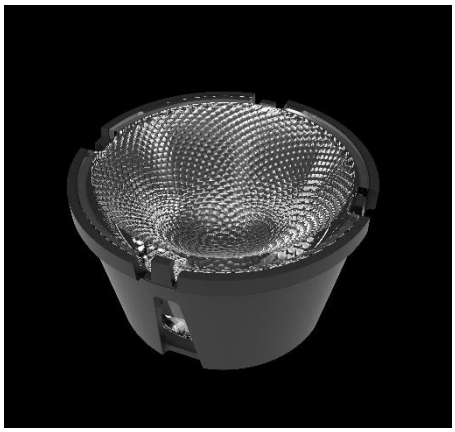



SUNLUMIN OPTICS CO.,LTD
address:
Shenzhen, Guangdong Province, China
E
info@sunlumin-optics.com
www.
sunlumin-optics.com


产品图 Product drawing


版本 REV	日期 DATE	变更内容 CHANGE（ITEM）
A0	2026-8-7	新建 NEW








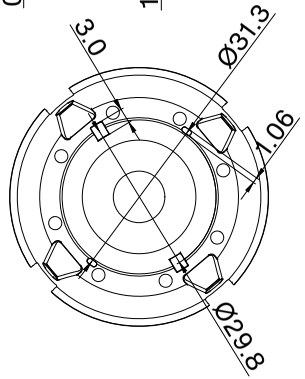



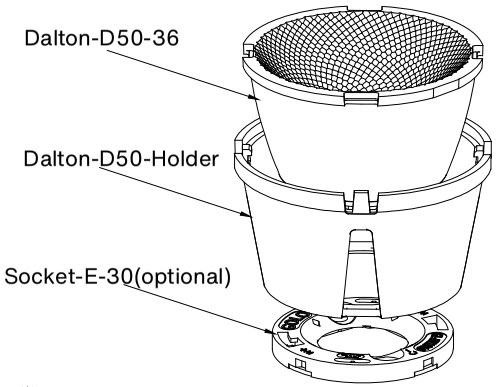

技术要求:
1. 图中有序号尺寸需要重点控制;
2. 产品不得有缺胶、气泡、收缩、黑点等异常;
3. 塑料成型的公差一般按照 GBT14486 标准，除非图纸另有说明。
硅橡胶成型的公差一般按照 ISO 3302-1 中的 M3 级，除非图纸另有说明。

Technical requirements:
1.The size of the ordered number in the figure needs to be controlled;
2.The product shall not have lack of glue, bubbles, shrinkage, black spots and other abnormalities;
3.Plastic moulding general tolerances according to GBT14486 and applies if not otherwise shown in the drawing.Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

序号 serial number	配件名称 Accessory name	配件代码 Accessory Code	材质 material	数量 quantity	备注 remark
3	Socket-E-30	S06.01.01.019	PBT	1pcs	optional
2	DALTON-D50-Holder	S06.01.01.020	PC	1pcs	
1	DALTON-D50-36	S01.01.02.489	PMMA	1pcs	

产品名称 Item name	S09.01.02.489_ DALTON-D50-36	产品材质 Product material	
图法 View	第三视角	设计 Designed by	YeJingsi
比例 Scale	1:1	审核 Checked by	Eric
单位 Unit	MM	批核 Approved by	Eric

SUNLUMIN OPTICS CO.,LTD


A4

OPTICAL RESULTS

1）PHOTOMETRIC DATA(MEASURED):

SAMSUNG


LED model	Samsung LC006D
Light colour	White
LEDs/each optic	1
FWHM	H33.6°,V33.9°
FWTH	H61.5°,V61.4°
Required components:	

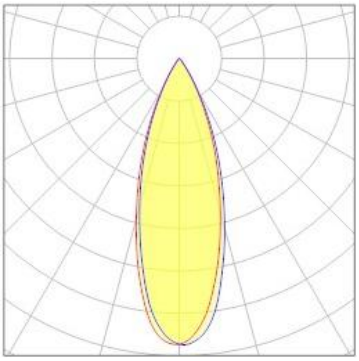


SUNLUMIN OPTICS CO.,LTD
address:
Shenzhen, Guangdong Province, China
E
info@sunlumin-optics.com
www.
sunlumin-optics.com

Usage and Maintenance


1)Due to varying asymmetric chip locations, especially on mid-power LEDs, the exact source of light is not always located at the centre of the LED packet. SunLumin recommends rotating such LEDs on the PCB in a regular pattern for smoother results.

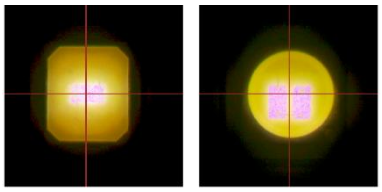

Sample layout proposal:

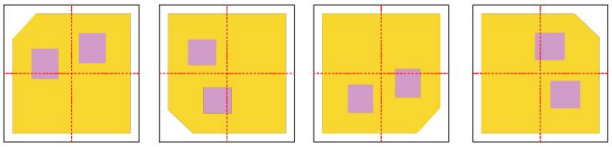

Example A



Example B

2) If necessary, clean lenses with mild soap, water and soft cloth.

3) Never use any commercial cleaning solvents on lenses, like alcohol.

4) Please handle lens with wearing gloves, skin oils may damage lens or its optical characteristic.

Disclaimer

When gule pass through holes, columns and other structures, or part of the thin structure, will form a weld line. Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specifications.

The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value. The chart data is for reference only. Please test the data again before using.

The appearance and specifications of the product can be changed to improve the quality and/or performance without notice.

SunLumin assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

Last update: 18-Sep-26