

DATASHEET

S01.01.01.454_CURIE-XX-A25_G2

Linear Lens:

Asymmetric beam for wall-washing and 1.0 mm metal sheet or profile. Variant made from PC.

CURIE-G2 SERIES, 280×40mm linear lens, Free arrangement of LEDs, optimized for 3030 size LED package. Compatible with 2835 LED package. Fit for 24mm wide ZHAGA PCB


General Information

| | |
|----------------|------------------|
| Lens Material | : Optical PC |
| Size | : 280x40mm |
| Typ.FWHM | : Asymmetric |
| Design LED | : Samsung LM301B |
| Compatibility | : 3030/2835 |
| Typ.Efficiency | : 81% |
| Fasten | : Clips |
| IP class | : IP20 |
| Zhaga | : N/A |
| RoHS | : YES |
| Color | : Clear |



产品图 Product drawing

| 版本 REV | 日期 DATE | 变更内容 CHANGE (ITEM) |
|--------|------------|--------------------|
| A0 | 2025-10-24 | 新建 NEW |
| A1 | 2026-3-17 | 修改logo位置 |
| | | |

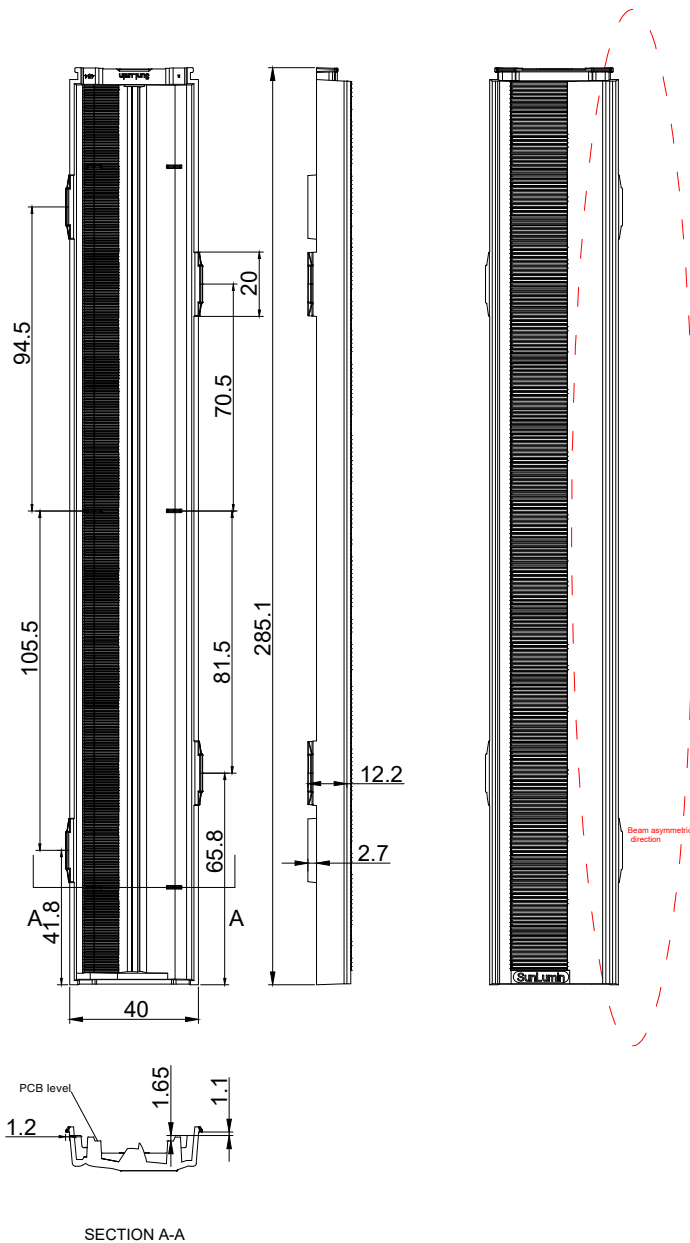

技术要求:

1. 图中有序号尺寸需要重点控制;
2. 产品不得有缺胶、气泡、收缩、黑点等异常;
3. 塑料成型的公差一般按照 GBT14486 标准, 除非图纸另有说明。
硅胶成型的公差一般按照 ISO 3302-1 中的 M3 级, 除非图纸另有说明。

Technical requirements:

1. The size of the ordered number in the figure needs to be controlled;
2. The product shall not have lack of glue, bubbles, shrinkage, black spots and other abnormalities;
3. Plastic moulding general tolerances according to GBT14486 and applies if not otherwise shown in the drawing. Silicone moulding general tolerances according to ISO 3302-1 Class M3 and applies if not otherwise shown in the drawing.

| | | | |
|-------------------|-----------------------------------|--------------------------|------|
| 产品名称 Item name | S01.01.01.454_ CURIE-XX-A25_G2 | 产品材质 Product material | PC |
| 图法 View | 第三视角 | 设计 Designed by | Hay |
| 比例 Scale | 1:1 | 审核 Checked by | Eric |
| 单位 Unit | MM | 批核 Approved by | Eric |


SUNLUMIN OPTICS CO.,LTD

OPTICAL RESULTS

1) PHOTOMETRIC DATA(MEASURED):

TYF 同一方


| | |
|----------------------|------------|
| LED model | TYF 3030 |
| Light colour | White |
| LEDs/each optic | 1 |
| FWHM | Asymmetric |
| Required components: | |

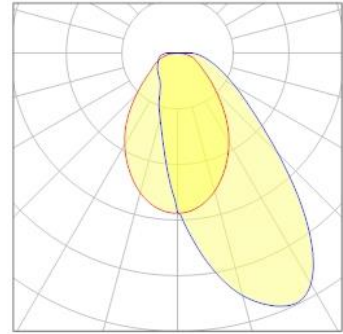

2) PHOTOMETRIC DATA(MEASURED):

SAMSUNG


| | |
|----------------------|------------|
| LED model | LM301B |
| Light colour | White |
| LEDs/each optic | 1 |
| FWHM | Asymmetric |
| Required components: | |

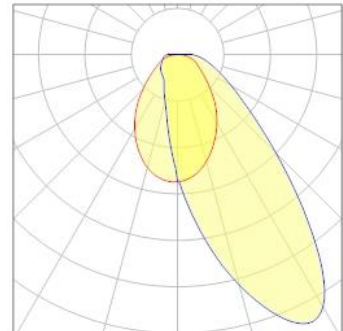

3) PHOTOMETRIC DATA(SIMULATED):

LUMILEDS

| | |
|----------------------|----------------|
| LED model | LUXEON 3030-2D |
| Light colour | White |
| LEDs/each optic | 1 |
| FWHM | Asymmetric |
| Required components: | |

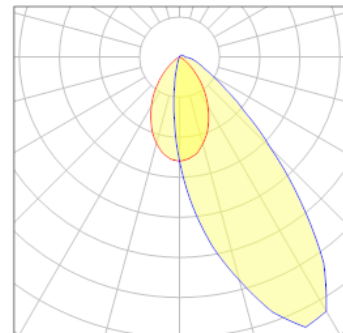

4) PHOTOMETRIC DATA(SIMULATED):




LED model JK3030-6V

Light colour White

LEDs/each optic 1

FWHM Asymmetric

Required components:

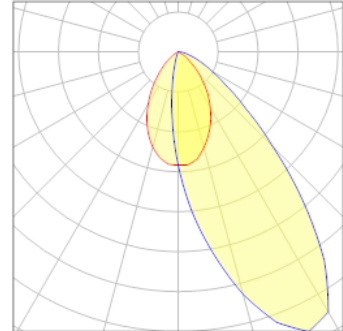

5) PHOTOMETRIC DATA(SIMULATED):




LED model GW_CSSRM3_PM

Light colour White

LEDs/each optic 1


FWHM Asymmetric

Required components:

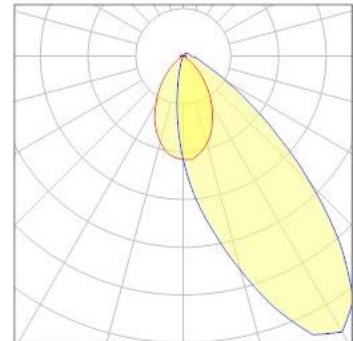


Usage and Maintenance


1) Due to varying asymmetric chip locations, especially on mid-power LEDs, the exact source of light is not always located at the centre of the LED packet. SunLumin recommends rotating such LEDs on the PCB in a regular pattern for smoother results.

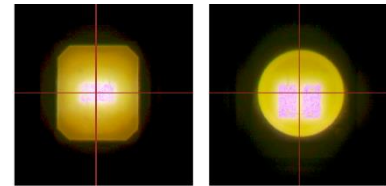

Sample layout proposal:

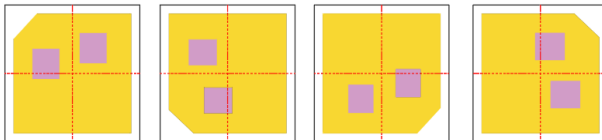

Example A

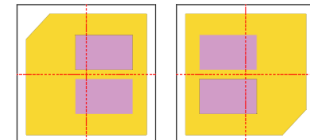

Example B

- 2) If necessary, clean lenses with mild soap, water and soft cloth.
- 3) Never use any commercial cleaning solvents on lenses, like alcohol.
- 4) Please handle lens with wearing gloves, skin oils may damage lens or its optical characteristic.

Disclaimer

When gule pass through holes, columns and other structures, or part of the thin structure, will form a weld line. Please note that flow lines and weld lines on the external surfaces of the lenses are acceptable if the optical performance of the lens is within the specifications.

The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value. The chart data is for reference only. Please test the data again before using.

The appearance and specifications of the product can be changed to improve the quality and/or performance without notice.

SunLumin assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

Last update: 19-Mar-26